


# MOULDING

## Windshield Moulding

### PREPARE ITEMS LISTED

Part Name	Part No.
Auto glass sealer (Three cement black)	08833-00030

### COMPONENTS

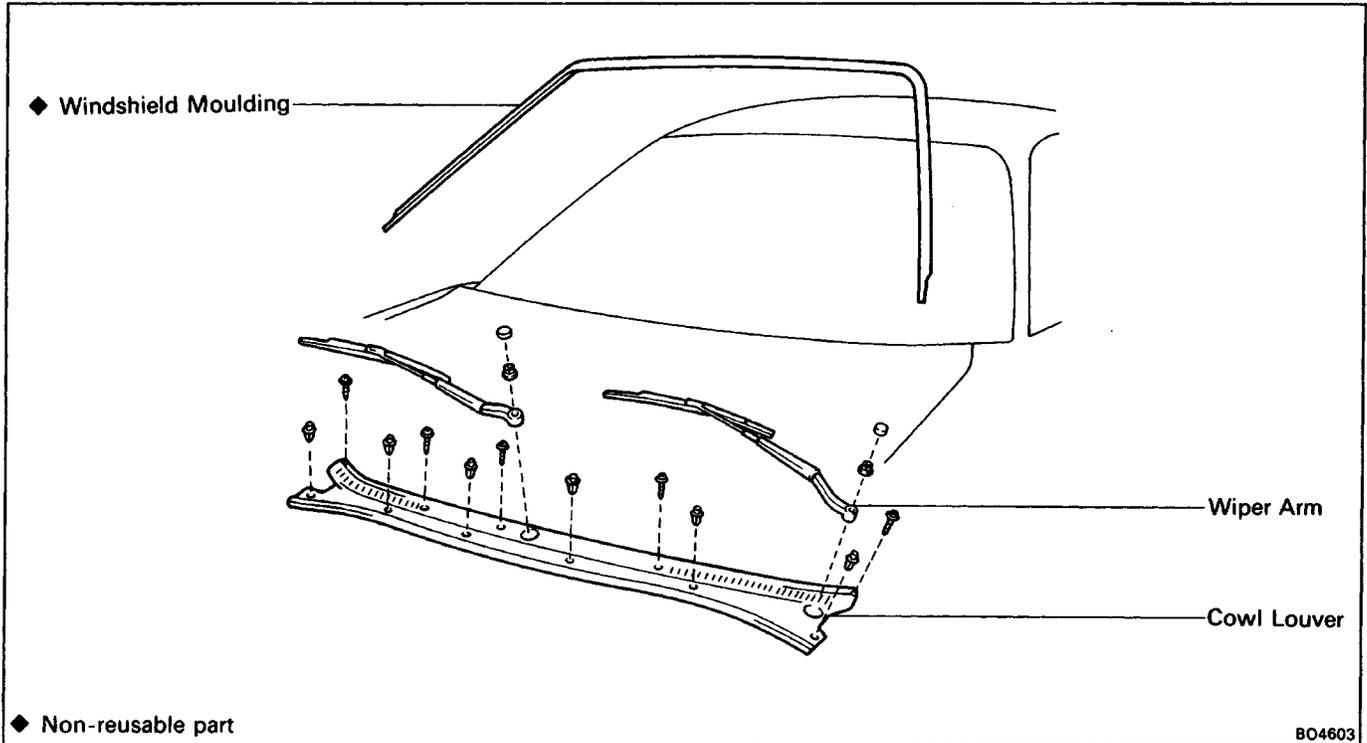


## REMOVAL OF WINDSHIELD MOULDING


1. REMOVE WIPER ARMS
2. REMOVE COWL LOUVER  
(See step 2 on page [BO-33](#))

### 3. REMOVE WINDSHIELD MOULDING

Using a knife, cut off the moulding as shown.

**NOTICE:** Do not damage the body with the knife.

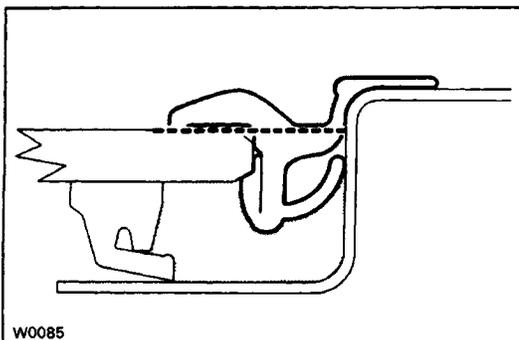

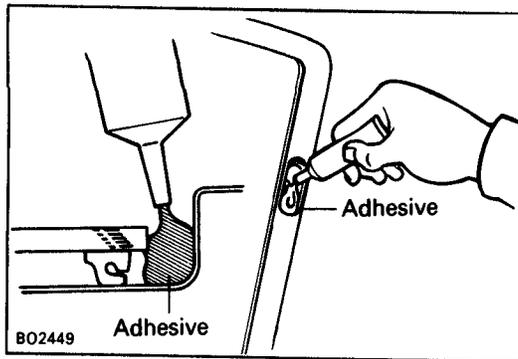

## INSTALLATION OF WINDSHIELD MOULDING

(See page [BO-21](#))

- 1. CUT ADHESIVE AT MOULDING INSTALLATION AREA**  
Using a knife, cut off the adhesive around the moulding installation area.
- 2. APPLY ADHESIVE AT MOULDING INSTALLATION AREA**
- 3. INSTALL WINDSHIELD MOULDING**  
Place the moulding onto the body and tap it by hand.

