
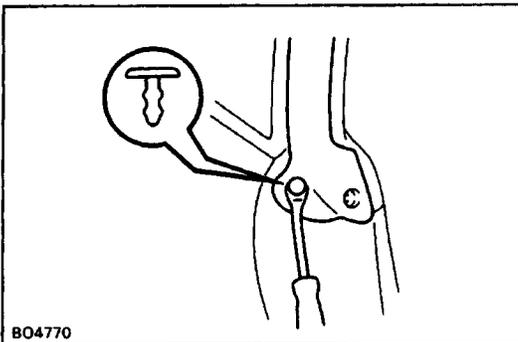


Body Outside Moulding COMPONENTS

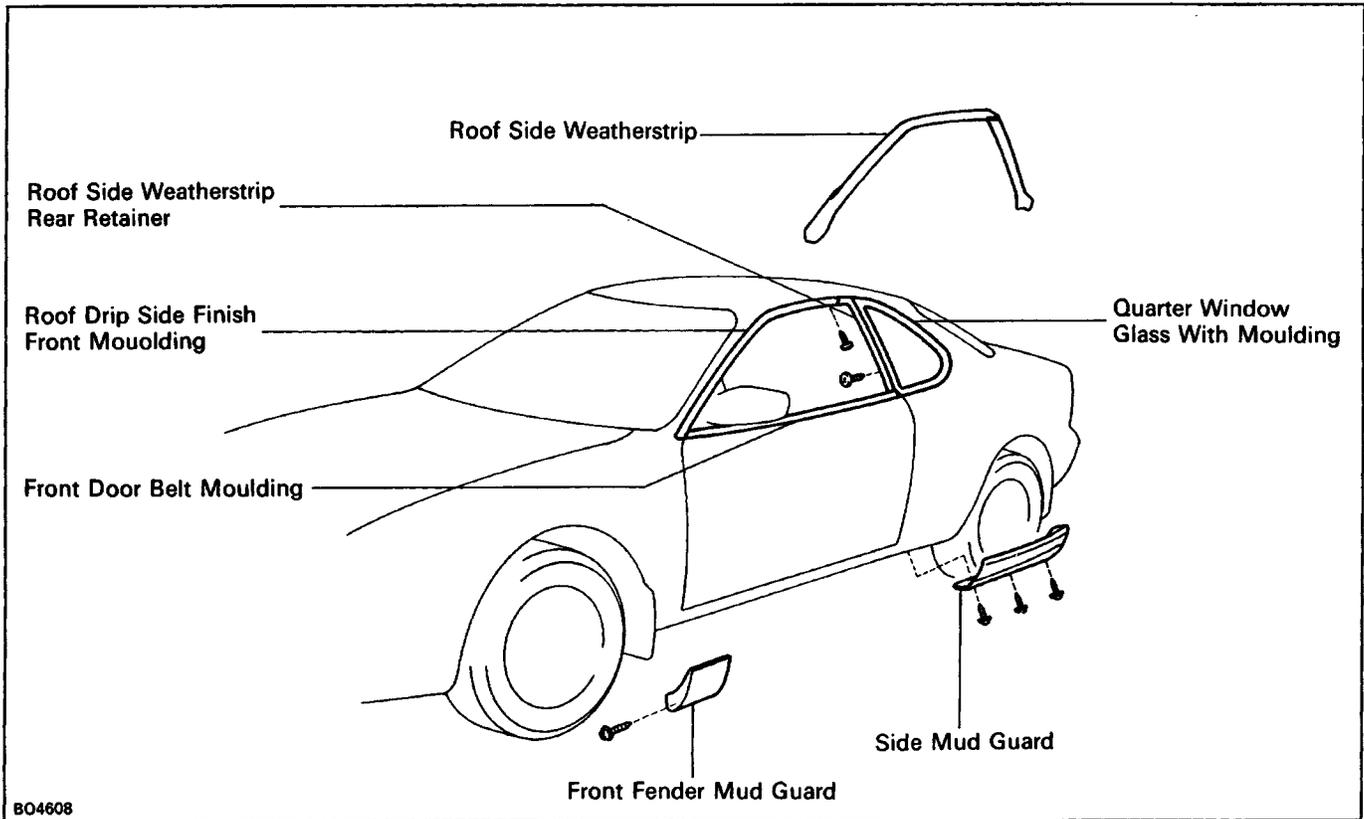


Roof Drip Moulding

REMOVAL

1. **REMOVE ROOF SIDE WEATHERSTRIP**
 - (a) Using a clip remover, remove four clips from the weatherstrip.
 - (b) Remove the weatherstrip from the end with your hand.
2. **REMOVE ROOF SIDE WEATHERSTRIP REAR RETAINER**
Remove three screws and the retainer.
3. **REMOVE ROOF DRIP SIDE FINISH FRONT MOULDING**
Remove ten screws and the moulding.

INSTALLATION

1. **INSTALL ROOF DRIP SIDE FINISH FRONT MOULDING**
Install ten screws and the moulding.
2. **INSTALL ROOF SIDE WEATHERSTRIP REAR RETAINER**
Install three screws and the retainer.

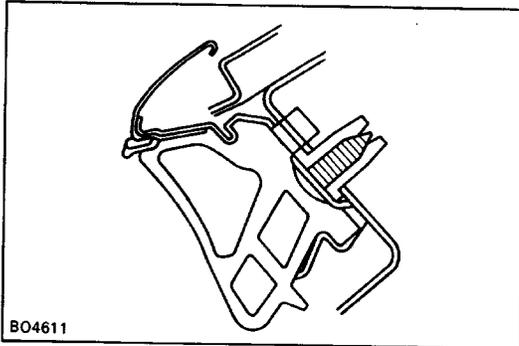

3. **INSTALL ROOF SIDE WEATHERSTRIP**
 - (a) Install the weatherstrip to the moulding as shown.
 - (b) Install four clips.


Front Door Belt Moulding

REMOVAL

1. **REMOVE FRONT DOOR COMPONENT PARTS:**
See steps 1, 2, 3, 5 and 6 on pages BO-6 to 8)
2. **REMOVE FRONT DOOR BELT MOULDIN:** See step 9 on page BO-9)

INSTALLATION

1. **INSTALL FRONT DOOR BELT MOULDIN:**
See step 9 on page BO-14)
2. **INSTALL FRONT DOOR COMPONENT PARTS:**
See steps 10, 12 and 18 on pages BO-14 and 17)

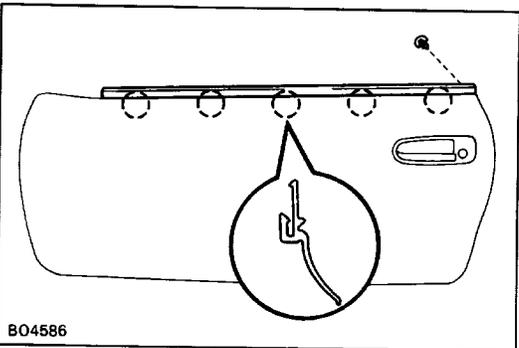

Quarter- Window Glass with Moulding

REMOVAL

Liftback: (See steps 1 to 9 on pages BO-39 to 40)
Coupe: (See steps 1 to 7 on pages BO-42 to 43)

INSTALLATION

Liftback: (See steps 1 to 3 on pages BO-40 to 41)
Coupe: (See steps 1 to 7 on pages BO-43 to 44)

Front Fender Mud Guard

REMOVAL AND INSTALLATION

1. **REMOVE MUD GUARD**
 - (a) Remove the screw.
 - (b) Using a screwdriver, pry loose clips and remove the mud guard.
2. **INSTALL MUD GUARD**
 - (a) Install the mud guard onto the body.
 - (b) Install the screw.

Side Mud Guard

REMOVAL AND INSTALLATION

1. **REMOVE MUD GUARD**
 - (a) Remove three screws.
 - (b) Using a clip remover, pry loose the clips to remove the mud guard.
2. **INSTALL MUD GUARD**
 - (a) Align the clips of the guard with the grommet, then install the guard.
 - (b) Install three screws.

